

FEMALE AUTO POWER JACK



Female inline jack. Accepts 31-085, 31-088, 31-097, 31-089, 31-099, 31-085E.

31-080-0 Bulk
31-080-1 Pkg.

AUTO POWER PLUG c/w LED



Fuseable auto power plug with green LED indicator.

31-085-0 3A/12VDC Bulk
31-085-1 3A/12VDC Pkg.

AUTO POWER PLUG c/w LED



Fuseable auto power plug with green LED indicator.

31-085E-0 10A/12VDC Bulk

AUTO POWER PLUG, FUSEABLE



31-088-0 Bulk
31-088-1 Pkg.

Auto cigarette lighter plug with fuse holder.

STANDARD AUTO PLUG



31-089-0 Bulk
31-089-1 Pkg.

Standard auto cigarette lighter plug.

AUTO PLUG/CORD



31-099-0 2.1mm Plug 8' cord Bulk
31-099-1 2.1mm Plug 8' cord Pkg.

DC POWER PLUGS



9.5mm barrel length
4 mm cable diameter

31-101-0 1.3mm I.D.
31-121-0 2.1mm I.D.
31-141-0 2.5mm I.D.
Use -2 for Display Pkg.



14mm barrel length
4 mm cable diameter

2.1mm I.D.
31-122-0 Bulk
31-122-1 Pkg.



9.5mm barrel length
4.3mm cable diameter

31-123-0 2.1mm I.D.
31-143-0 2.5mm I.D.
31-161-0 3.0mm I.D.
Use -2 for Display Pkg.

DC POWER PLUGS cont'd




14mm barrel length
4.3mm cable diameter

31-124-0 2.1mm I.D.
31-144-0 2.5mm I.D.
Use -2 for Display Pkg.

DC POWER JACKS



31-132-0 2.1mm
31-152-0 2.5mm
Use -1 for Display Pkg.

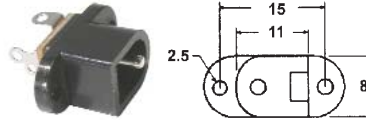


Max. 2A @ 16VDC
31-133-0 2.1mm
31-153-0 2.5mm
Use -2 for Display Pkg.




Max. 2A @ 16VDC
31-134-0 2.1mm
31-154-0 2.5mm
Use -2 for Display Pkg.
13mm chassis mtg. hole.



Compact isolated chassis mount DC power jack. 8mm mounting hole. Max. 2A @ 16VDC.
31-134M-0 2.1mm
31-154M-0 2.5mm
Use -2 for Display Pkg.

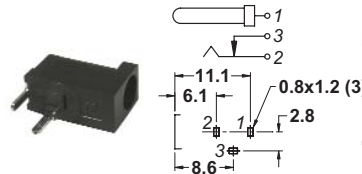


Max. 2.5A @ 16VDC
31-150-0 1.3mm
Use -2 for Display Pkg.



Max. 2.5A @ 16VDC
31-155-0 2.1mm
31-156-0 2.5mm
Use -2 for Display Pkg.
PBT Material 220 deg. C



Max. 2A @ 16VDC
31-157-0 2.1mm
31-158-0 2.5mm
Use -1 for Display Pkg.

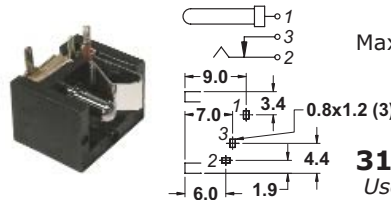

Max. 2A @ 16VDC
31-159-0 2.5mm
Use -2 for Display Pkg.

MODE ELECTRONICS LTD.
6830 BURLINGTON AVE.,
BURNABY, B.C., CANADA, V5J 4H1
Phone: **604-435-6633**
Fax: **604-435-8890**
Toll Free: **1-800-663-4992**
Web Site: **www.mode-elec.com**