

NOTE:

- 1) Level VI Efficiency Power Supply
- 2) RoHS

Electrical Specification

Input:


Rated Input Voltage: AC 120V
 Acceptable Input Voltage: AC 110 ~ 120V
 Rated Frequency: 60Hz
 Acceptable Frequency: 50 ~ 60Hz
 Standby Power Consumption: 0.21W Max
 Input Current: 230mA Max

Output:


Open Load Output Voltage: 11.8V±10%
 Rated Output Current: 1A
 Rated Output Power: 9W
 Full Load Output Voltage: 8.6V±10%

Mechanical Specification

Dimension (LxWxH): 84.0 x 58.9 x 42.0mm
 Operating Temperature: -10°C ~ 40°C
 Storage Temperature: -20°C ~ 85°C
 Operating Humidity Range: 30% ~ 80%
 Storage Humidity: 10% ~ 95%

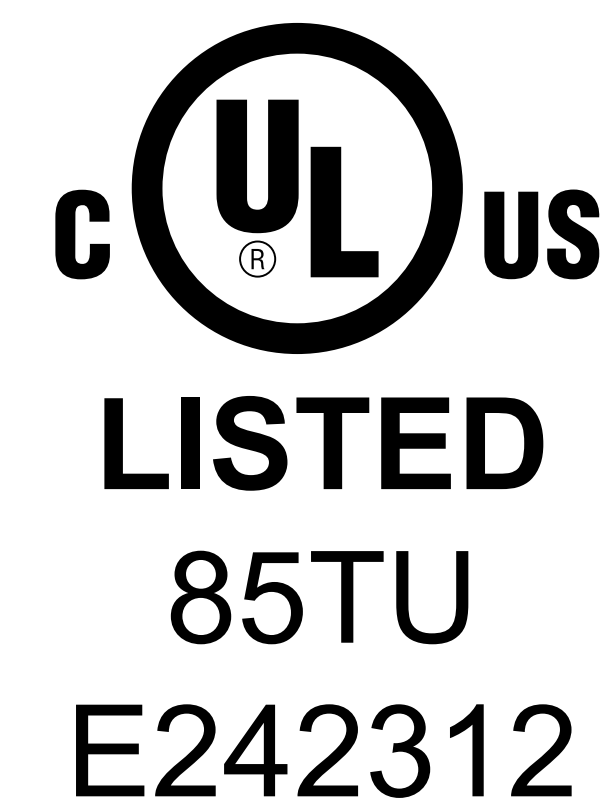

Circuit Diagram:

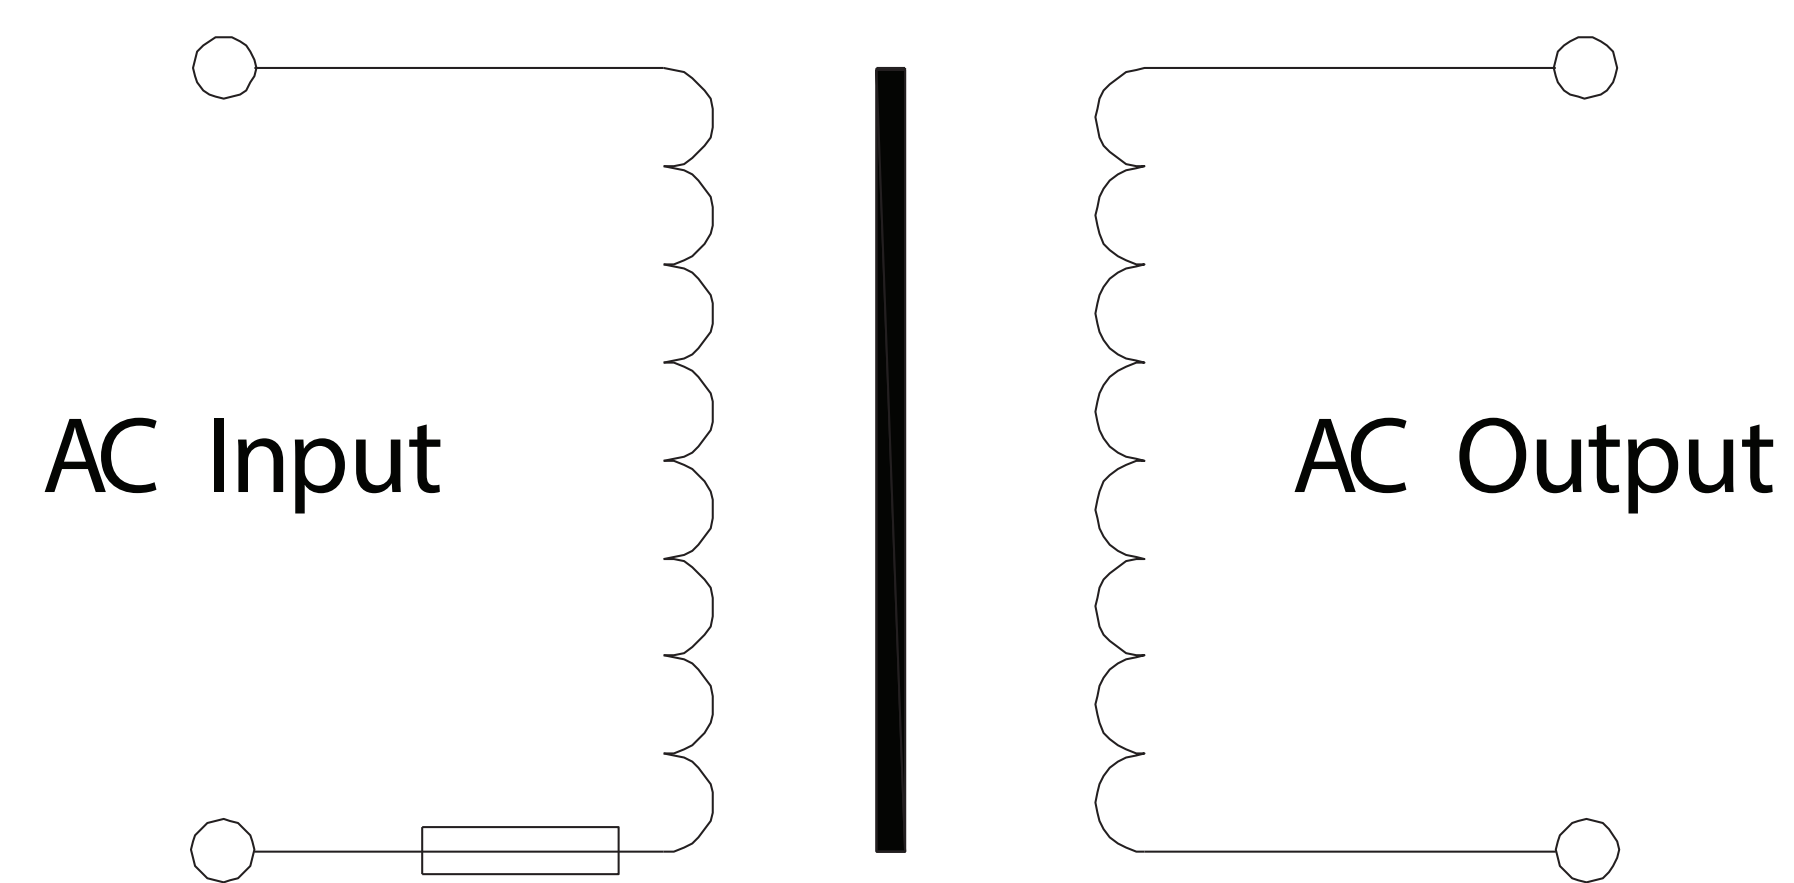

Case:
 C6600(X)/WK-48-UL-HB

Output Wire:
 DC-2468-24-1900-5.5*2.1+12

TITLE AC ADAPTER		SCALE	
		NTS	
DRAWING NO. 68-901A			
		UNITS	mm
FILE NAME 68-901A.pdf		SHEET	1/1



Mode Electronics Part Number 68-901A-1